



## Keep your Onspots in tune General Guidelines

Bulletin # 3130063

Grease Arm Bearings




Check Play In:

- Ball Joint
- Chainwheel Bearings
- Arm Bearings

Check Tire Sidewall Pressure  
(minimum 20 Lbs)

Check Chainwheel Contact  
Operating Angle  
Pitch  
Contact Height


Torque Chart	Standard	Extreme Duty
Adapter nuts installed under OEM U-bolt nuts	150 ft.lbs.	250 ft.lbs.
Adapter nuts replacing OEM U-bolt nuts	OEM Spec	OEM Spec
Adapter nut Capscrews	150 ft.lbs.	250 ft.lbs.
Chain Unit Capscrews	125 ft.lbs.	150 ft.lbs.
Adjustable Chainwheel Retainer Capscrews	35 ft.lbs.	35 ft.lbs.
Chainwheel Bolt Nut	125 ft.lbs.	125 ft.lbs.

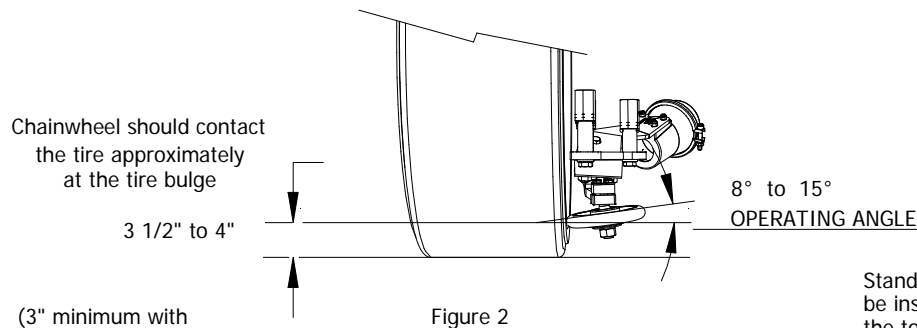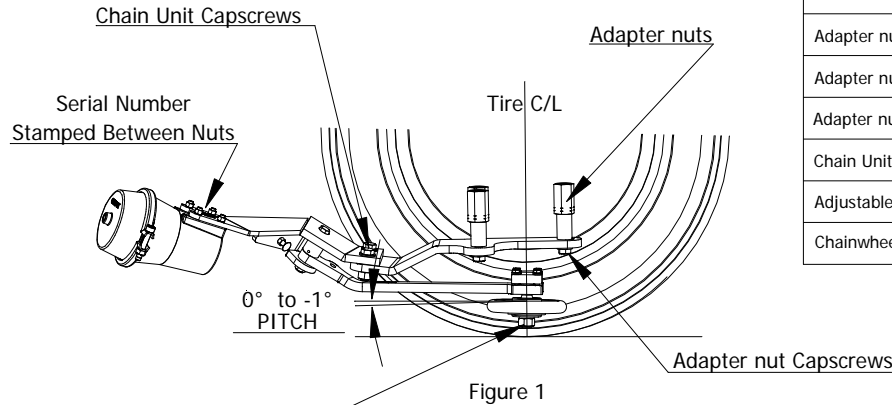

(3" minimum with vehicle loaded and 20" wheels or larger)

2 3/4" contact on loaded vehicle with 16" wheels and 170mm chainwheel

Red Chainwheel Driver Side  
Blue Chainwheel Passenger Side

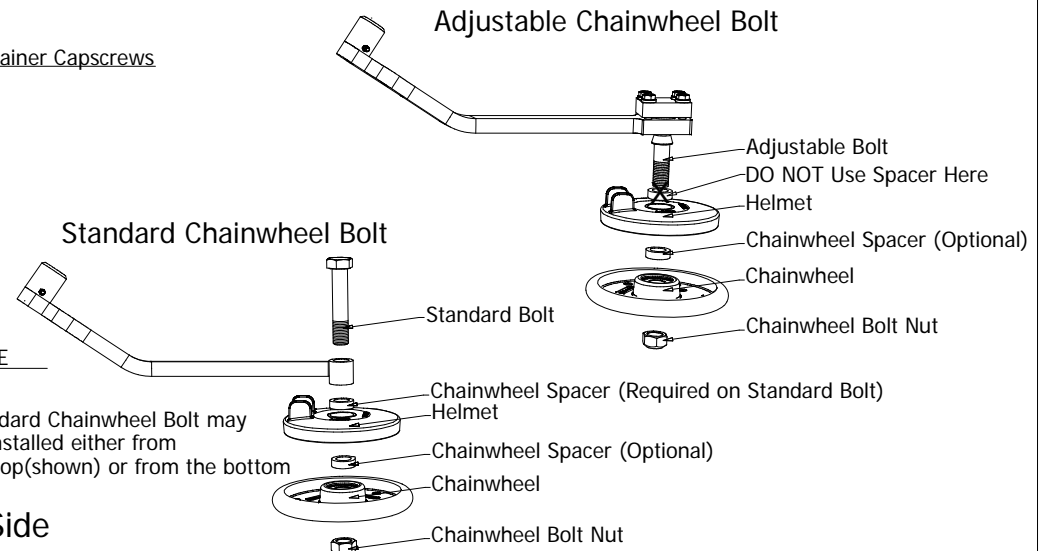

Standard Chainwheel Bolt may be installed either from the top (shown) or from the bottom

# 1-800-224-2467

Additional information available on our website at:  
[www.onspot.com](http://www.onspot.com)